

JEDO

POCKET DOOR KITS

FRELAN
HARDWARE

POCKET DOOR KIT


Pocket doors are a simple yet effective architectural feature designed to maximise space and flexibility within a room. Unlike traditional hinged doors, they slide neatly into a concealed cavity within the wall, allowing for a cleaner line of sight and more usable floor area. Commonly used in both contemporary and classic interiors, pocket doors offer a practical solution for areas where space is limited or where a more open, adaptable layout is desired.

Designed to suit 4 x 2 (89mm) stud work and 12.55 plasterboard. Leaving a finished wall thickness of 114mm.
The internal space is 57mm, suitable for 25mm - 45mm thick doors.
35mm doors with raised beading and mouldings can be used so long as the overall thickness does not exceed 45mm.

One single size of track works for all. The track is clearly marked to show where the fitter will need to cut to suit common door sizes.

Adjustable on site to suit doors up to 2040 (H) x 860 (W) x 44mm (T)
Rated to take doors up to 100kg.

For single door configuration only one kit is required.
For double door configuration, two single kits and a double door adapter are required.

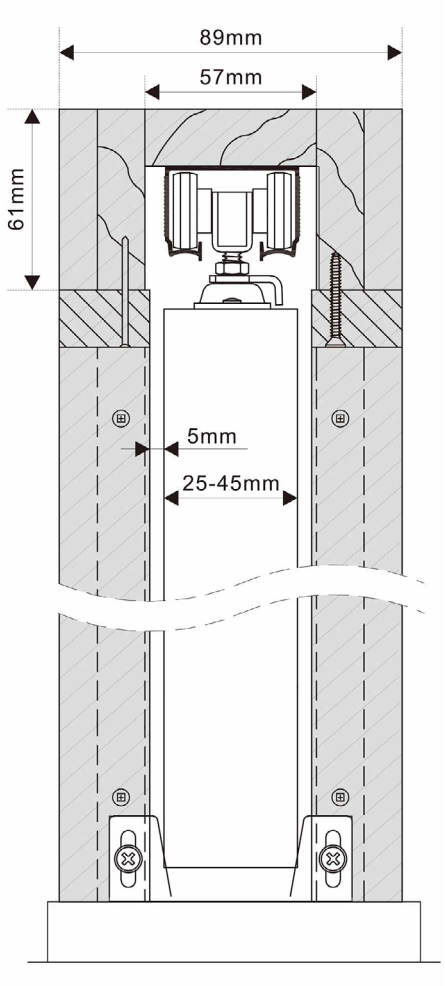



Pocket door kit



Adapter


SINGLE
DOOR
CONFIGURATION

JVPDK

Single pocket door kit

- Adjustable on site to suit doors up to 2040 (H) x 860 (W) x 44mm (T)
- Rated to take up to 100kg
- 5 year guarantee against manufacturing defects
- Supplied as standard with soft close / open
- No option or finishing jambs or brushes. Jambs will need to be made up by fitters on site




DOUBLE
DOOR
CONFIGURATION

JVPDKD

Double pocket door kit containing:

JVPDK

Single pocket door kit X2

JVPDA

Adapter



DOOR OPENING SIZES

HEIGHT OF APPROXIMATE OPENING			
NOMINAL DOOR HEIGHT	**MINIMUM HEIGHT OF APPROXIMATE OPENING**	**BRACKET FASTENER HEIGHT FROM FINISHED FLOOR**	**BRACKET FASTENER HEIGHT FROM SUB-FLOOR**
78” (1981mm)	82 - 1/2” (2095mm)	78 - 3/4” (2000mm)	79 - 1/2” (2019mm)
80” (2032mm)	84 - 1/2” (2146mm)	80 - 3/4” (2051mm)	81 - 1/2” (2070mm)
80” 1/4 (2040mm)	84” - 1/4-1/2” (2154mm)	80” - 1/4-3/4” (2059mm)	81” 1/4 - 1/2” (2078mm)
Custom	Door Height + 4 (101.6mm) - 1/2” (12.7mm)	Door Height + 3/4” (19.05mm)	Door Height + 1 (25.4mm) - 1/2” (12.7mm)

MAXIMUM HEIGHT OF DOOR PERMITTED FOR USE IS 80 ‘ 1/4 (2040mm)

WIDTH OF APPROXIMATE OPENING	
NOMINAL DOOR WEIGHT	**WIDTH OF APPROXIMATE OPENING**
24” (610mm)	49” (1245mm)
27” (686mm)	55” (1397mm)
28” (711mm)	57” (1447mm)
30” (762mm)	61” (1549mm)
33” (838mm)	67” (1701mm)
24” 5/8 (626mm)	49” 5/8 (1277mm)
28” 5/8 (726mm)	57” 5/8 (1477mm)
32” 1/2 (826mm)	65” 1/2 (1677mm)
Custom	(2 x Door Width) +1” (25mm)