# Product data sheet

## Premier


AR9798




| | |
|---|---|
| Article number | 50031168 |
| Product ref. | AR9798-SE |
| EAN-Code | 5051358031425 |
| Country of origin | Taiwan |
| CN-Code | 83026000 |
| Door type | wooden door/metal door |
| Tested door width | 1400 mm |
| Tested door weight | 120 kg |
| Arm Application | figure 1 and 6 |
| Mechanism function | Electro-magnetic, hold-open/swing free option |
| Mechanism type | Rack & pinion |
| Fixings | Timber door and metal door |
| Shape | Slimline |
| Power size | 3 to 6 |
| Opening Angle | max. 180° opening |
| Mechanism dimensions and fixing centres | 256.5x60x48.2 mm; centres 118.5x218.5x45 mm |
| Arm type | Scissor arm, fixed joint, hold open,swing free |
| Finish | SE Silver Enamel |
| Arm finish | SE Silver Enamel |
| Range | ARRONE Range |
| Packing unit | 1 |
| Outer carton | 3 |

ARRONE overhead door closing device:

- Power size: EN 3 to EN 6
- Function: closing, latching, electro hold open, electro free swing
- Cover: slimline
- Arm application: Fig 1 and Fig 6 fixing positions
- Successfully type tested for conformity to all requirements of **BS EN 1154:1997** and **BS EN 1155:1997**
  Tested: door width 950-1,400 mm, door weight 60-120 kg
  Classification (Fig 1): 4 | 8 | 3-6 | 1* | 1 | 3
  Classification (Fig 6): 3 | 8 | 3-5 | 1* | 1 | 3
- Fire tested to **BS EN 1634-1**: suitable for 30, 60 and 120 minute timber fire doors
- Certification:
  CE: AE10644
  Certifire Pending

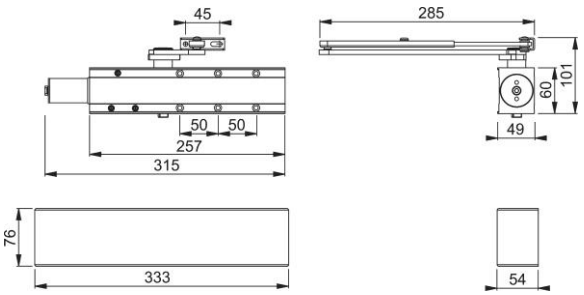


© HOPPE (UK) Ltd, All rights reserved. 9/8/2026

HOPPE (UK) · Ltd Gailey Park · Gravelly Way · Standeford · Wolverhampton WV10 7GW
Tel. 01902 484 400 · Tel. Sales Direct: 01902 484 410/20 · info.uk@hoppe.com · www.hoppe.com